

PROPAGATION CHARACTER OF PLANE VOLUME WAVES
IN ELASTIC MAGNETOSTRICTIVE MEDIA

G.Y. Baghdasaryan, V.G. Garakov, Z.N. Danoyan, M.A. Mikilyan

ХАРАКТЕР РАСПРОСТРАНЕНИЯ ПЛОСКИХ ОБЪЕМНЫХ ВОЛН
В УПРУГИХ МАГНИСТОСТРИКЦИОННЫХ СРЕДАХ

Г.Е.Багдасарян, В.Г.Гараков, З.Н.Даноян, М.А.Микилян

Исследован характер распространения плоских объемных волн в диэлектрической магнестрикционной среде в присутствии постоянного магнитного поля. Исследования были проведены на основе линейных дифференциальных уравнений и соответствующих условий, описывающие поведение возмущений в магнестрикционных средах, взаимодействующие с магнитными полями. Показано, что имеются три типа волн, которые могут распространяться в магнестрикционной среде: квазипродольная магнестрикционно связанная, квазиперечная магнестрикционно связанная и поперечная несвязанная. Более того, рассмотрена та волна, в которой материальные частицы среды колеблются перпендикулярно той поверхности, которая формируется направлениями данного магнитного поля и распространения волны. Поведение вышеупомянутых волн исследовано в зависимости как от интенсивности магнитного поля, так и от ориентации магнитного поля относительно плоскости распространения волны.

Գ.Ե.Բաղդասարյան, Վ.Գ.Գարակով, Զ.Ն. Դանոյան, Մ.Ա.Միկիլյան

Հարթ ծավալային աղիւծների տարածման վարքը առանձնական մագնիսատրիկցիոն միջավայրերում

Հետազոտված է դիէլեկտրիկ մագնիսատրիկցիոն միջավայրում ծավալային հարթ ալիքների տարածման քննարկը մագնիսական դաշտի առկայությամբ: Հետազոտությունները կատարված են մագնիսական դաշտերի հետ փոխազդեցության մեջ գտնվող մագնիսատրիկցիոն միջավայրերի պրոպերտիների վարքը նկարագրող դիֆերենցիալ հավասարումների և համապատասխան պայմանների հիման վրա: Զույգ է տրված, որ գոյություն ունեն երեք տիպի ալիքներ, որոնք կարող են տարածվել մագնիսատրիկցիոն միջավայրում քվազիերկայնական մագնիսատրիկցիոնապես կապակցված, քվազիերկայնական մագնիսատրիկցիոնապես կապակցված և ընդդայնական չկապակցված: Ավելին, կապակցված չէ այն ալիքը, որում միջավայրի մասնիկները տատանվում են այն հարթությանը ուղղահայաց, որը կազմվում է տրված մագնիսական դաշտի և ալիքի տարածման ուղղություններիով: Վերը նշված ալիքների վարքը ինտեգրված ինչպես մագնիսական դաշտի ինտենսիվությունից, այնպես էլ ալիքների տարածման հարթության նկատմամբ մագնիսական դաշտի ուղղվածությունից:

The character of propagation of plane volume waves in elastic dielectric magnetostriptive media in the presence of constant magnetic field is investigated. Investigations have been done on the basis of linear differential equations and conditions describing the perturbation behavior in elastic magnetostriptive media interacting with magnetic fields. It is shown that there are three types of waves that can be propagated in the elastic magnetostriptive media: quasilongitudinal magnetostrictionally coupled, quasitransversal magnetostrictionally coupled and transversal uncoupled. Moreover, uncoupled is that wave in which the material particles of the medium are vibrated perpendicular to the plane which is formed by the direction of given magnetic field and wave propagation. Behavior of the above-mentioned waves is investigated depending on both the intensity of magnetic field, as well as magnetic field's orientation with respect to the plane of wave propagation.

1. Introduction

Currently there are many works where several problems of propagation of electromagnetoelastic waves in solids are investigated. They are mainly devoted to the wave processes in conductive non-ferromagnetic media and in dielectric media with piezoelectric or ferromagnetic (with linear characteristic of magnetization) properties.

There are some works devoted to the issues of existence and propagation of waves in magnetoactive media in dependence on intensity of magnetic field and properties of the medium. The works [10,11] are devoted to the investigation of surface magnetoelastic waves with thermal relaxations, and in the work [9] the issues of existence of shear surface waves in magnetostrictive half-space (Blustein-Guljaev type wave) are studied. The issues of interaction between magnetic and acoustic waves in magnetoactive media are investigated in works [1,6]. The issues of existence and propagation of shear surface waves in piezomagnetic media are studied in [3]. In the works [4] the issues of reflection of shear magnetoelastic waves in magnetoactive media. It is discovered that when the volume wave falls on the edge of division between magnetoactive half-space and vacuum the qualitatively new vibrations (accompanying surface magnetoelastic vibrations) accompany the usual reflection process, which are conditioned exclusively by the magnetostrictive property of the medium. In the work [2] the linearized equations and boundary conditions are derived characterizing the behavior of small disturbances in non-conductive magnetoactive elastic media using non-linear equations and boundary conditions of the theory of magnetoelasticity of ferromagnetic bodies [1,2,5,6,8,13] and using the linearization technique [2,7,8]. Here on the basis of addressed in [3] linear boundary value problems by solving two-dimensional problems of wave dynamics, the character of propagation of plane volume waves depending on the magnetostrictive properties of the medium and its interaction with magnetic field is studied.

2. Basic equations and boundary conditions

Let an elastic dielectric media with the ordered magnetic structure is placed in an external stationary magnetic field, which in absence of a ferromagnetic body is characterized by the vector of intensity $\vec{H}_0$ and vector of a magnetic induction $\vec{B}_0 = \mu_0 \vec{H}_0$ ($\mu_0 = 4\pi \cdot 10^{-7}$ H/A² is the magnetic constant). The surroundings of the body are considered as vacuum.

The paper [2] is devoted to issues of mathematical modeling of disturbed motion of considered magnetoelastic medium in the presence of an external magnetic field. In that paper, using the basic postulates of nonlinear theory of magnetoelasticity of ferromagnetic bodies [1,2,5,6,8,13] and the theory of small disturbances, via linearization technique [2,7,8] the following linear equations and surface conditions describing the behavior of small disturbances in the noted magnetoactive deformable media are obtained:

equation in internal area

$$\begin{aligned} \frac{\partial}{\partial x_i} \left(s_{ik} + s_{im}^0 \frac{\partial u_k}{\partial x_m} \right) + \mu_0 M_i^0 \frac{\partial h_k}{\partial x_i} + \mu_0 m_i \frac{\partial H_k^0}{\partial x_i} - \rho_0 \frac{\partial^2 u_i}{\partial t^2} \\ \text{rot} \vec{h} = 0, \quad \text{div} \vec{b} = 0, \quad \vec{b} = \mu_0 (\vec{h} + \vec{m}) \\ s_{ij} = \bar{c}_{ijkl} \frac{\partial u_k}{\partial x_l} + \mu_0 c_{ijk} m_k \\ h_i = g_{ijk} \frac{\partial u_j}{\partial x_k} + A_{ik} m_k \end{aligned} \quad (2.1)$$

where s_{ik} disturbances of components of the tensor of magnetoelastic stresses; s_{ik}^0 are components of the tensor of stresses in unexcited shape; u_k are the disturbances of the vector of elastic displacements $\vec{u}^n$ of unexcited state; h_i , m_i and b_i are components of vectors $\vec{h}$, $\vec{m}$ and $\vec{b}$, which are disturbances according to the intensity $\vec{H}^0$.

magnetization $\vec{M}^0$ and magnetic induction $\vec{B}^0$ of unexcited magnetic field, x_i are Cartesian coordinates;

equations in external area

$$\operatorname{rot} \vec{h}^{(e)} = 0, \quad \operatorname{div} \vec{h}^{(e)} = 0, \quad \vec{b}^{(e)} = \mu_0 \vec{h}^{(e)} \quad (2.2)$$

index "e" here and further means belonging to the external area;

boundary conditions on the surface S_0 of unexcited body:

$$\begin{aligned} \left[s_{ik} + s_{km}^0 \frac{\partial u_i}{\partial x_m} \right] n_k^0 &= [t_{ik}^{(e)} - t_{ik}] n_k^0 + [T_{km}^{0(e)} - T_{km}^0] \frac{\partial u_i}{\partial x_m} n_k^0 \\ [b_i - b_i^{(e)}] n_i^0 &= [B_m^0 - B_m^{0(e)}] \frac{\partial u_i}{\partial x_m} n_i^0 \\ \varepsilon_{mkl} \left\{ [h_k - h_k^{(e)}] n_m^0 - [H_k^0 - H_k^{0(e)}] \frac{\partial u_l}{\partial x_m} n_i^0 \right\} \end{aligned} \quad (2.3)$$

where T_{km}^0 and $T_{km}^{0(e)}$ are Maxwell stress tensors of unexcited shape for a body and medium respectively (see (2.9)), n_k^0 are components of the external unit vector $\vec{n}_0$ to the surface S_0 , ε_{ijk} is the Levi-Civita's tensor.

$$\begin{aligned} t_{ik} &= b_i H_k^0 + h_i H_k^0 - \mu_0 \delta_{ik} \vec{H}^0 \vec{H}^0 \\ t_{ik}^{(e)} &= \mu_0 [h_i^{(e)} H_k^{0(e)} + h_k^{(e)} H_i^{0(e)} - \delta_{ik} \vec{H}^{0(e)} \vec{H}^{0(e)}] \end{aligned} \quad (2.4)$$

In the equations (2.1) the following notations are used.

$$\begin{aligned} \bar{c}_{ijkl} &= c_{ijkl} + \mu_0 A_{pq} M_r^0 M_s^0 (\delta_{ik} \delta_{pj} \delta_{rq} + \delta_{ik} \delta_{iq} \delta_{rp} + \delta_{ip} \delta_{iq} \delta_{rk} + \\ &\quad + \frac{\mu_0}{2} B_{pqrs} (\delta_{ip} \delta_{jq} \delta_{rk} + \delta_{iq} \delta_{jk} \delta_{rp} + \delta_{ik} \delta_{jr} \delta_{qp}) M_r^0 M_s^0 + \\ &\quad + \mu_0 B_{pqrs} (\delta_{pk} \delta_{ql} \delta_{is} M_r^0 + \delta_{ip} \delta_{jq} \delta_{ks} M_r^0) M_r^0, \\ e_{ijk} &= B_{ijkl} M_l^0 + A_{mi} (\delta_{kj} M_m^0 + \delta_{mk} M_j^0) \\ g_{ijk} &= B_{jkpi} M_p^0 + A_{rs} (\delta_{ik} \delta_{rs} M_r^0 + \delta_{is} \delta_{rk} M_r^0 + \delta_{ij} \delta_{sk} M_r^0) \end{aligned} \quad (2.5)$$

where c_{ijkl} , A_{ki}^{-1} and B_{ijkl} are tensors of elastic constants, magnetic permeability and magnetostrictive constants, respectively.

For magnetoelastic bodies which in the non-magnetization shape are isotropic with respect both magnetic and elastic properties, the following equations are [2,12,13]:

$$\begin{aligned} c_{ijkl} &= \lambda \delta_{ij} \delta_{kl} + \mu (\delta_{ik} \delta_{jl} + \delta_{il} \delta_{jk}), \quad A_{ik} = \chi^{-1} \delta_{ik} \\ B_{ijk} &= e_2 \delta_{ij} \delta_{kl} + \frac{1}{2} (e_1 - e_2) (\delta_{ik} \delta_{jl} + \delta_{il} \delta_{jk}) \end{aligned} \quad (2.6)$$

where λ and μ are Lamé constants; χ is the magnetic permeability; e_1 and e_2 are magnetostrictive constants of the medium.

It is necessary to add to the equations (2.2) the conditions of attenuation of disturbances of magnetic quantities on infinity.

When considering the linearized equation and expressions (2.1) - (2.5) it is noticed, that into the coefficients of these expressions the quantities with superscript "0" are

included, which in turn also non-linear and should be linearized. Details of the specified process of linearization are investigated in the work [8]. Here (in the work [2]) the simplified variant is applied based on identifications of geometry of an initial body in a non-excited state. By this assumption it is accepted, that a) the magnetic field of the unexcited shape coincides with a magnetic field of a non-deformable body and b) stresses and deformations of the unexcited shape can be defined from the solution of the following static problem of the theory of elasticity:

equations of equilibrium

$$\frac{\partial x_i^0}{\partial x_i} + \mu_2 M_i^0 \frac{\partial H_i^0}{\partial x_i} = 0 \quad (2.7)$$

$$x_i^0 = c_{ij} \frac{\partial u_j^0}{\partial x_i} + \mu_2 A_{ij} M_j^0 M_i^0 + \frac{1}{2} \mu_2 B_{ijkl} M_j^0 M_k^0 M_l^0$$

conditions on a surface of a non-deformable body

$$s_i^0 N_i^0 = [T_i^{(0)} - T_i^0] n_i^0$$

where

$$T_i^{(0)} = H_i^0 B_i^0 - \frac{1}{2} \mu_0 \delta_{ij} [\bar{H}^0]^2 \quad (2.9)$$

$$T_{ij}^{(0)} = \mu_0 H_i^{(0)} H_j^{(0)} - \frac{1}{2} \mu_0 \delta_{ij} [\bar{H}^{(0)}]^2$$

Included in (2.7) - (2.9) characteristics of the non-disturbed magnetic field, according to the accepted assumption are defined from the following problem of magnetostatics for a non-deformable body:

equations magnetostatics in the internal area

$$\begin{aligned} \operatorname{rot} \bar{H}^0 &= 0, \quad \operatorname{div} \bar{B}^0 = 0 \\ \bar{B}^0 &= \mu_0 (\bar{H}^0 + \bar{M}^0), \quad H_i^0 = A_{ij} M_j^0 \end{aligned} \quad (2.10)$$

equations in the external area

$$\begin{aligned} \operatorname{rot} \bar{H}^{(0)} &= 0, \quad \operatorname{div} \bar{H}^{(0)} = 0 \\ \bar{M}^{(0)} &= 0, \quad \bar{B}^0 = \mu_0 \bar{H}^{(0)} \end{aligned} \quad (2.11)$$

conditions on the surface

$$(\bar{B}^0 - \bar{B}^{(0)}) \cdot \bar{n}_0 = 0, \quad (\bar{H}^0 - \bar{H}^{(0)}) \times \bar{n}_0 = 0 \quad (2.12)$$

and condition on infinity

$$\bar{H}^{(0)} \rightarrow \bar{H}^{(0)} \text{ for } x_1^2 + x_2^2 + x_3^2 \rightarrow \infty \quad (2.13)$$

Thus, the issues of investigation of behavior of disturbances of magnetoelastic quantities of some shape is reduced to the consequently solution of the following three tasks:

1. Definition of the characteristics of a magnetic field of a non-deformable body on the basis of equations (2.10) - (2.13);

2. Definition of magnetoelastic quantities of the unexcited shape on the basis of equations (2.7) - (2.9) with the use of the solution of the first task;

3. Investigation of behavior of magnetoelastic disturbances on the basis of equations (2.1) - (2.6) with the use of the solutions of first two tasks.

On the basis of the formulated above boundary value problems and results of works [3,4] we'll consider the propagation character as volume as well as surface plane waves

depending on magnetostrictive properties of the medium and on the magnetoelastic interactions.

3. Propagation Character of Volume Plane Waves

Let us consider the propagation of a plane magnetoelastic wave in a boundless magnetostrictive dielectric medium assuming that the perturbations depend on one of the Cartesian coordinates only, say x_1 and the time t . We choose the orthogonal system x_1, x_2, x_3 in such a way, that the coordinate plane (x_1, x_2) coincides with the plane formed by the direction of the given magnetic field $\vec{H}$ and the direction $\vec{n}$ of the propagation of the plane wave (the axis Ox_1 is parallel to the vector $\vec{n}$). Then in this coordinate system the external magnetic field will have the form $\vec{H}_0 = (H_{01}, H_{02}, 0)$, where $H_{01} = \text{const}$.

Taking into account the above-stated from (2.1)-(2.6) we have the following equations relative to the components of the displacement vector $\vec{u}(u_1, u_2, u_3)$ and the vector of the induced magnetic field $\vec{h}(h_1, h_2, h_3)$, which describe perturbed state of the medium under consideration in the case of one-dimensional motions have the form:

$$\begin{aligned} a_{11} \frac{\partial^2 u_1}{\partial x_1^2} + a_{12} \frac{\partial^2 u_2}{\partial x_1^2} &= \rho_0 \frac{\partial^2 u_1}{\partial t^2} \\ a_{21} \frac{\partial^2 u_1}{\partial x_1^2} + a_{22} \frac{\partial^2 u_2}{\partial x_1^2} &= \rho_0 \frac{\partial^2 u_2}{\partial t^2} \\ a_{33} \frac{\partial^2 u_3}{\partial x_1^2} &= \rho_0 \frac{\partial^2 u_3}{\partial t^2} \end{aligned} \quad (3.1)$$

$$\begin{aligned} h_1 &= \frac{\chi}{\mu_r} \left[(\chi e_1 + 3) H_{01} \frac{\partial u_1}{\partial x_1} + (\chi e_2 + 1) H_{02} \frac{\partial u_2}{\partial x_1} \right] \\ h_2 &= 0, \quad h_3 = 0 \end{aligned} \quad (3.2)$$

where

$$\begin{aligned} a_{11} &= \lambda + 2\mu + \mu_0 \chi^2 \left\{ \left[\frac{1}{\mu_r} (\chi e_1 + 3)^2 - \frac{1}{\chi} \left(\chi^2 e_1^2 + \frac{3}{2} \chi e_1 + 3 \right) \right] H_{01}^2 + \right. \\ &\quad \left. + \frac{e_2}{2} [1 - \chi(e_1 - e_2)] H_{02}^2 \right\} \\ a_{22} &= \mu + \mu_0 \chi^2 \left\{ \gamma H_{01}^2 + \left[e_1 - \frac{3}{2} e_2 + \frac{\chi e_2 + 1}{\mu_r} \left(1 - \frac{e_1 - e_2}{2} \right) \right] H_{02}^2 \right\} \\ a_{33} &= \mu + \mu_0 \chi^2 \left(\gamma H_{01}^2 + \frac{1}{2} e_2 H_{02}^2 \right) \\ a_{12} &= \mu_0 \chi^2 \left[e_1 - \frac{\alpha}{\chi} (\chi e_2 + 1) - \frac{e_2 - 1}{\mu_r} (\chi e_2 + 3) \right] H_{01} H_{02} \end{aligned} \quad (3.3)$$

$$\sigma_{21} = \mu_0 \chi^2 \left(e_1 - \frac{a}{\mu_1} (e_1 - 3) - \frac{a^2}{\chi} \right) H_{01} H_{02}$$

$$\gamma = \frac{1}{2} e_1 - \frac{a^2}{\chi}, \quad a = 1 + \chi \frac{e_1 - e_2}{2}$$

From (3.1) follows that the displacement u_j is defined independently of u_1, u_2 in the boundless medium and the corresponding transversal waves are magnetostrictively unbounded since they don't bring to the rise of induced magnetic field, as it is shown from (3.2).

Let

$$u_j = u_j^0 \exp[i(kx_j - \omega t)] \quad (j = 1, 2, 3) \quad (3.4)$$

be the solution of (3.1), which corresponds to the propagation of the plane bulk magnetoelastic wave with the frequency ω and wave number k .

Substituting (3.4) into the (3.1) we get a linear system of homogeneous algebraic equations with respect to the amplitudes u_j^0 . Applying the condition of existence of non-trivial solution for the mentioned system, we get the formulas, which define the velocities c_i of the propagation of magnetostrictively bounded waves:

$$c_i^2 = \frac{a_{11} + a_{22} + q_i}{2\rho_0}, \quad i = 1, 2 \quad (3.5)$$

$$c_3^2 = \frac{a_{33}}{\rho_0}$$

The following notation is introduced in (3.5)

$$q_i = (-1)^{i+1} \left[(a_{11} - a_{22})^2 + 4a_{12}a_{21} \right]^{1/2} \quad (3.7)$$

Given equations and obtained relations easily imply that if the medium is non-ferromagnetic $\chi = 0$ or the external magnetic field is absent ($H_1 = 0$) then $c_1^2 = (\lambda + 2\mu)/\rho_0$, $c_2^2 = c_3^2 = \mu/\rho_0$ and the results are coincided with the famous results for the pure elastic plane waves. The analysis of the characteristic equation depending on the orientation of given magnetic field shows, that

a) If the magnetic field is parallel or perpendicular to the direction of propagation ($\vec{H} \parallel \vec{n}$ or $\vec{H} \perp \vec{n}$, where $\vec{n}$ - is the direction of propagation of the plane wave) then all three waves are propagated independently;

b) In the case of $\vec{H} \perp \vec{n}$ one of these waves with the velocity c_1 is pure longitudinal and the other two waves are pure transversal and propagated with different velocities ($c_2 \neq c_3$);

c) In the case of $\vec{H} \parallel \vec{n}$ the velocities of transversal waves coincide ($c_2 = c_3$) (as in the case of pure elastic plane waves), pure longitudinal magnetoelastic wave with the velocity c_1 and a pure transversal wave with the velocity c_2 are propagated in the media and the propagation velocities depend on the value of magnetic field induction.

In other cases (in the sense of direction of magnetic field) in the magnetostrictively coupled waves the vector of displacement $\vec{u}$ is not perpendicular or parallel to the direction of propagation of waves.

However taking into consideration that for the basic magnetostrictive materials $\chi e_i B_s^2 / \mu_0 \mu \ll 1$ (where the B_s is the induction saturation), we observe that the deflection of $\vec{u}$ from the direction $\vec{n}$ in the case of wave with the velocity c_1 and the deflection of $\vec{u}$ from the plain of front for in the case of wave with the velocity c_2 nonsignificant. For this reason the first wave can be called quasi-longitudinal and the second one - quasi-transversal.

Thus it is shown that there are three types of plane magnetoelastic waves which can be propagated in the magnetostrictive elastic medium: quasi-longitudinal magnetostrictively coupled, quasi-transversal magnetostrictively coupled and transversal uncoupled.

Numerical Results. In previous point we have investigated the influence of interaction between magnetic field and magnetostrictive media. In particular it was shown that the anisotropy caused by magnetic field can qualitatively change the character of wave field in magnetostrictive media. Here numerical calculations are made for certain materials with the purpose of revealing the quantitative influence of magnetic field on velocities of plane waves propagation. For calculations *Ferrite F-107* and *FerroNickel NiFe₂O₃* are chosen. For these materials the physical and mechanical constants are taken from the monograph [12] and they are:

For *Ferrite F-107* -

$$\rho_0 = 5.26 \cdot 10^3 \text{ kg/meter}^3; \lambda = 1.02 \cdot 10^{11} \text{ Newton/meter}^2;$$

$$\mu = 0.66 \cdot 10^{11} \text{ Newton/meter}^2; \mu_r = 30; e_1 = 42.2; e_2 = -22.1.$$

For *FerroNickel NiFe₂O₃* -

$$\rho_0 = 7.1 \cdot 10^3 \text{ kg/meter}^3; \lambda = 1.17 \cdot 10^{11} \text{ Newton/meter}^2;$$

$$\mu = 0.55 \cdot 10^{11} \text{ Newton/meter}^2; \mu_r = 32; e_1 = 124.2; e_2 = -62.1.$$

The results for the *Ferrite F-107* are brought in fig.1 and for the *FerroNickel NiFe₂O₃* - in fig. 2. In the figure

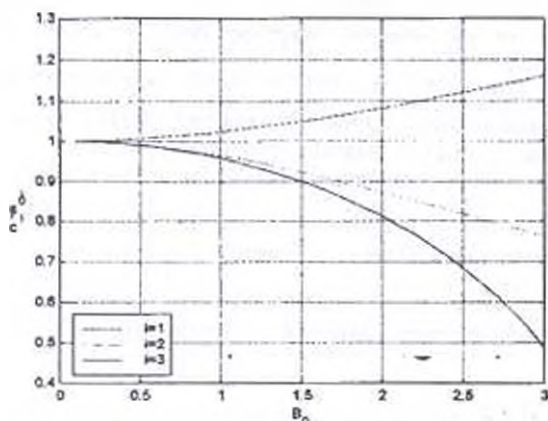


Fig. 1

Dependence of velocity of volume waves on magnetic induction for the Ferrite F-107

the dependence of c_i/c_0 on magnetic field induction are brought, when

$B_{01} = \frac{1}{2} B_0$, $B_2 = \frac{\sqrt{3}}{2} B_0$. Here c_i , $i=1,2,3$ - are velocities of propagation of

magnetoelastic plane waves, which are defined from the formula $c_i^2 = \frac{a_{11} + a_{33} + q_i}{2\rho_0}$, $i = 1, 2$; $c_3^2 = \frac{a_{11}}{\rho_0}$; and $c_{01}^2 = \frac{\lambda + 2\mu}{\rho_0}$ is the propagation velocity of longitudinal plane wave; $c_{30}^2 = c_{03}^2 = \frac{\mu}{\rho_0}$ are the propagation velocities of transversal plane waves in the absence of magnetic field.

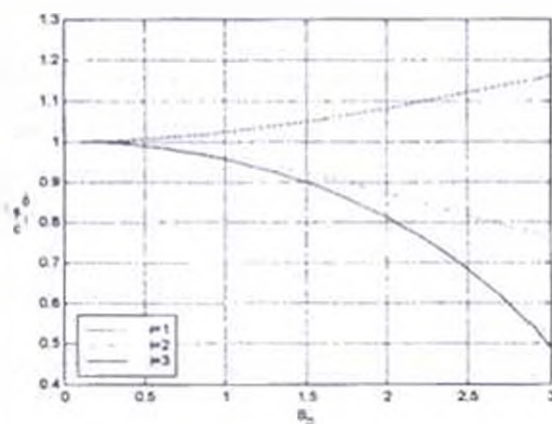


Fig. 2

Dependence of velocity of volume waves on magnetic induction for the FerroNickel F-107

From these figures it is easy to draw conclusions that:

1. With respect of magnetic field the velocity of transversal wave is more sensitive;
2. Depending on magnetic field value the velocity of longitudinal wave increases and the velocity of transversal wave decreases;
3. As it was shown in previous point the magnetic field influence is more essential for the materials having higher magnetostrictive constants.

4. Conclusions

A number of results and conclusions related to the character of propagation of volume plane waves in elastic dielectric magnetostrictive media in presence of constant magnetic field were made. It was shown that:

- there are three types of plane magnetoelastic volume waves, which can be propagated in the magnetostrictive elastic medium: quasi-longitudinal magnetostrictively coupled, quasi-transversal magnetostrictively coupled and transversal uncoupled;
- with respect to the magnetic field the velocity of transversal wave is more sensitive; depending on the magnitude of magnetic field the velocity of longitudinal wave increases and the velocity of transversal wave decreases.

References

1. A.I. Aghiezer, V.G. Baryakhtar, S.V. Peletinski, Spin Waves. Moscow, Nauka, 1967, - 368p (in Russian).
2. G.Y. Baghdasaryan, Mathematical Modeling of Excitement Behavior in Magnetostrictive media, in Math. Methods and Phys.-Mech. Fields, 1998, vol.41, №3, pp. 70-75 (in Russian).
3. G.E. Baghdasaryan, Z.N. Danoyan, and V.G. Garakov, Shear Surface Magnetoelastic Waves in Anisotropic Piezomagnetic Half-Space. - Proceeding of the II SU Symposium "Strength and Technological Products Made Of Composite Materials". Yerevan, 1984. Vol.1, pp.92-96.
4. G.E. Baghdasaryan, Z.N. Danoyan, and L.A. Sanoyan, The Reflection of Shear Magnetoelastic Waves From the Free edge of Piezomagnetic Half-Space. - Proc. Sci. Publ., Mechanics, Pub. House YSU, 1986, 5, pp/102-109. (in Russian)
5. W.F. Brown, Magnetoelastic Interactions, Springer-Verlag, New York, 1966, -155p.
6. G.A. Maugin, Continuum Mechanics of Electromagnetic Solids. Elsevier Science Publishers B.V., 1988, -560p.
7. V.V. Novojilov, The Basis of Non-linear Theory of Elasticity, Moscow, Gostechizlat, 1948, 212p (in Russian).
8. Y-H Pao, C.-S. Yeh, A Linear Theory for Soft Ferromagnetic Elastic Solids, Int. J. Eng. Sci., 11, 1973, №4, pp.415-436.
9. J.P. Parekh, Magnetoelastic surface wave in ferrites, Electronics Letters. vol.5, №14, 1969, pp.322-323.
10. Y. Shindo, S. Tomita, Thermoelastic Rayleigh Waves With Thermal Relaxation in the Magnetic Field Normal to the Surface. Bull. Acad. Pol. Sci., Ser. Sci. Techn., 1979, 27, №1, pp.9-15.
11. Y. Shindo, S. Tomita Rayleigh Waves in Magnetoelastic Solids With Thermal Relaxations. Int. J. Eng. Sci., 1979, 17, №2, pp.227-232.
12. L.N. Sirkin, Piezomagnetic Ceramics, Leningrad. Energy, 1980, 205p (in Russian).
13. K.B. Vlasov, Some Issues of the Theory of Elastic Ferromagnetic (Magnetostrictive) Media. Proc. Acad. Sci. USSR, Ser. Phys. 1957, vol.21, №8, pp.1140-1148.

Institute of Mechanics NAS Armenia
Yerevan State University

Received
20.01.2005